


Concrete Plugs



The concrete plug is used for patching tie holes created by the use of plastic cone. It eliminates job patching problems and is easy to install, using concrete bond. The plug is designed to fit the empty hole left by the 1" x 1" plastic cone and is stocked in concrete gray.

Magnetic Setting Tool

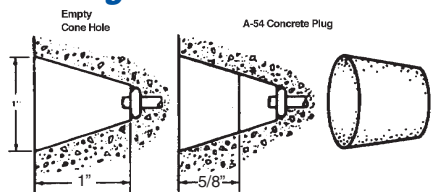


Form Patch (Plywood Hole Cover)

- 1-3/4" dia. Gal Stock
- 2-1/4" dia. Gal Stock
- 2-3/4" dia. Gal Stock




Flat Ties

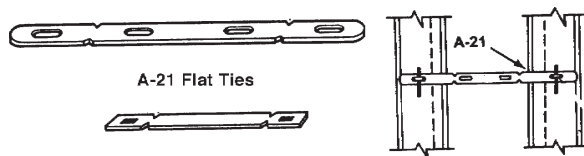


Flat Ties are available in several styles and breakbacks for use with various modular steel frame forming systems.

Coil Ties

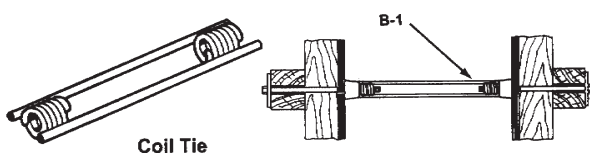


Coil Ties are strong, resistance welded ties designed for medium and heavy forming applications. Coil tie products are available in two or four struts, with screw-on plastic cones and water-resistant versions. 1/2", 3/4", 1" and 1-1/4" diameters are available.

Continuous Threaded Coil Rod

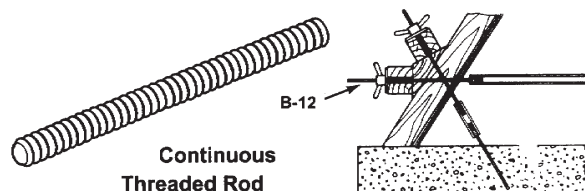


Continuous Threaded Rod is available in 1/2" to 1-1/4" diameters in 1/4" increments. Available in special cut-to-length sizes or in standard 12' lengths, Continuous Threaded Rod is used with other coil tie products in many different combinations and applications.

Coil Bolts and Minimum Coil Penetration Information

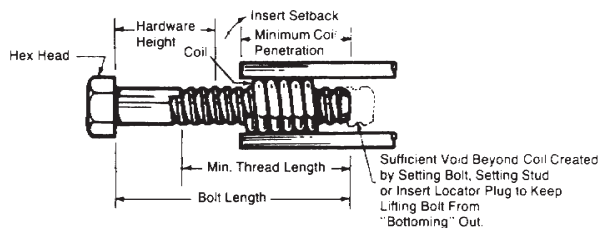

Coil bolts have fast-acting, self-cleaning threads and are available in 1/2", 3/4", 1", 1-1/4" and 1-1/2" diameter bolts.

Adjustable Coil Bolt

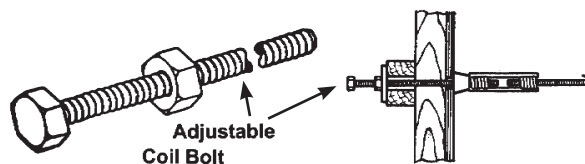

The Adjustable Coil Bolt is adaptable for special applications at corners, batter walls, etc., where one-size Adjustable Coil Bolt may replace several different lengths of the standard Coil Bolt.