





Flat Washer

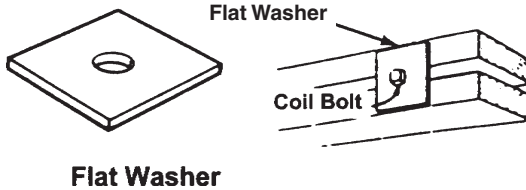

Flat Washer


Flat Washers are made from high carbon, flat steel plate in sizes to fit all coil bolt, she-bolt and taper tie applications.

Coil Nut and Handle Coil Nut

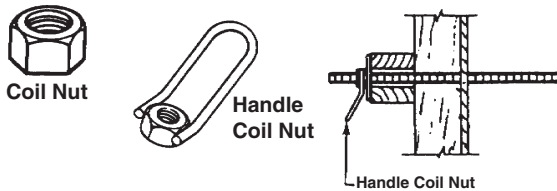


Coil Nuts and Handle Coil Nuts are available in 1/2", 3/4", 1" and 1-1/4" diameters with coil thread. The Handle Coil Nut eliminates the need of a wrench and makes installation and stripping fast and simple.

Nut Washers (Cat Heads)

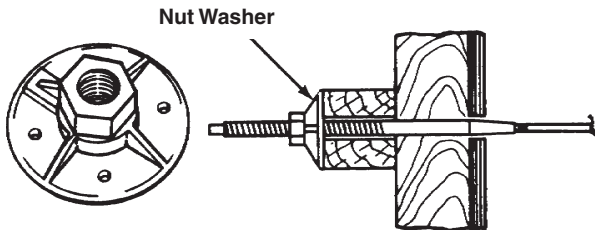


Nut Washers are one-piece ductile steel designs combining the washer and nut in a single unit. Nail holes are provided to secure the washer to the formwork. Nut Washers are furnished with coil thread in 1/2" through 1" diameters for use with any coil thread device. Available in 3/4" Acme thread and is used with the She-Bolt.

She-Bolts

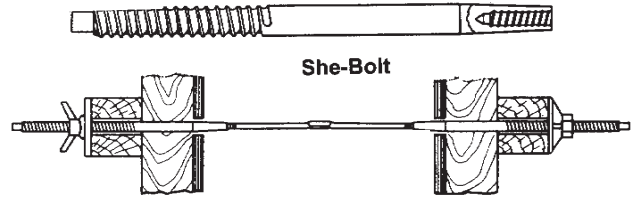


She-Bolts are high strength units suitable for heavy concrete construction. Manufactured with either Acme or coil external threads, they provide a positive system for use with gang and/or steel forms. She-Bolts are used in conjunction with inside tie rods, below.

Inside Tie Rods

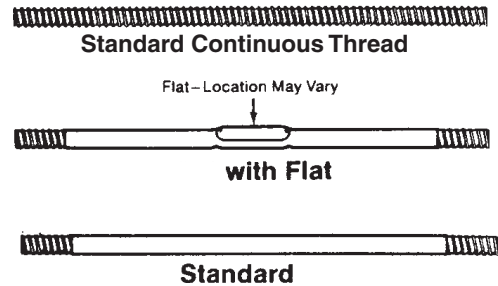

Inside Tie Rods for She-Bolts are manufactured in three styles; plain, with flats and continuous threaded. Positive stops and/or water-resistant models are available.

Taper Ties

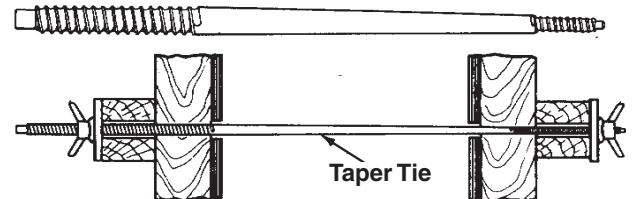

Taper Ties are used where specifications permit complete removal of the form tie from the concrete. They are manufactured with either Acme or coil thread and with up to 75" of taper.