


## Don De Cristo Concrete Accessories, Inc.

*"Devoted to Safety, Quality Products,  
and Most of All, Customer Service"*



### Tie Hole Plugs For Plywood

- Slightly tapered shape makes installation easy.
- Once applied, they stay in place through many pours.
- Practically flush with finished form surface.
- Resulting concrete is smooth and nearly flat.




9/16" Size for Snap Ties Holes  
13/16" Size for 3/4" She Bolt holes

### Waler Brackets



Designed for double 2 x 4 or 2 x 6 strongbacks, used with a heavy duty snaptie wedge.

### Liner Clamps

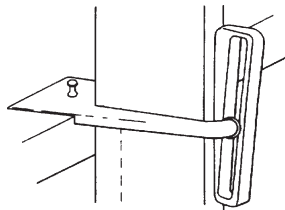


Liner Clamps are specifically designed for use as a single 2 x 4 strongback clamp.



**= Products in Stock &  
Available for Rent**

### Pencil Rod Clamps

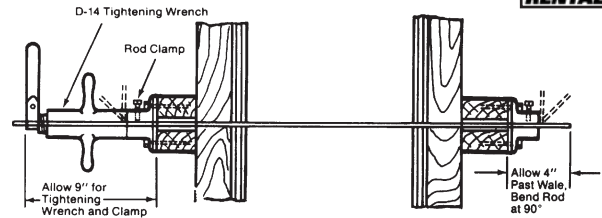



Pencil Rod available in pre-cut lengths as desired. Nail holes are provided for securing the rod clamps to the wales. For additional safety, rods must be bent at approximately a 90° angle behind the clamps.



### Tightening Wrench For Pencil Rod



The tightening wrench is placed over the pencil rod behind the rod clamp. It services to draw the forms into position and holds them until the set screw on the rod clamp is properly tightened. Do not use for straightening forms or for pulling pencil rod from hardened concrete.

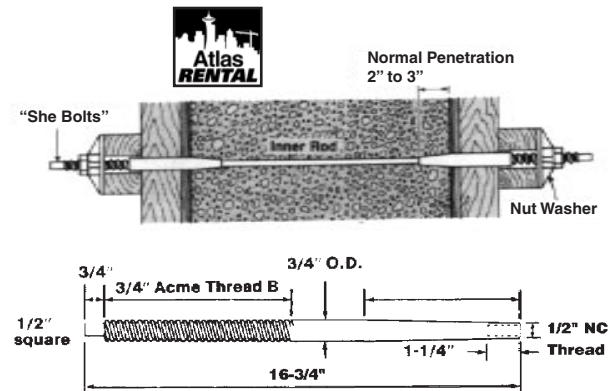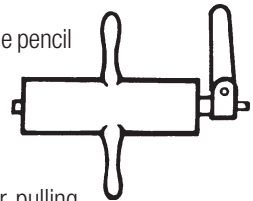

She Bolts are a positive, strong form tying method. They are adjustable to accommodate varying battered wall conditions, and can be completely removed from the wall. Standard waler rods shown here all take 1/2" diameter inner rods threaded 13 U.N.C. and 3/4" nut washers. Other sizes available on special order.