

Mixing Nozzles and Nuts

Epoxy-Tie Mixing nozzles are designed for proper proportioning of Epoxy-Tie adhesive.

EMN37: 18 element mixing nozzle for all gel consistency epoxy SET, ETF, ET22, ET22C and ETI Gel




EMN122: 32 element mixing nozzle for ETI low viscosity epoxy

Description	Model No.	Pkg Qty.	Ctn. Qty.
6-18 element nozzles and 6 retaining nuts for 22 oz. sbs cartridges	EMN22	6	30
18 element nozzle for 22 or 56 oz. sbs cartridges	EMN37		50
	EMN37B		500
Retaining nuts for 22 or 56 oz. sbs cartridges	ENN22		50
	ENN22B		500
32 element nozzle	EMN122	6	30

Brushes

ETB (Epoxy-Tie) Brushes are available in four sizes

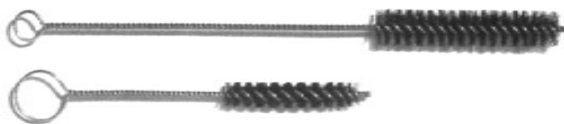

Description	Model No.	For Hole Size	Ctn. Qty.
1/2" dia. x 3" brush (8" total length)	ETB4	1/4" - 9/16"	24
3/4" x 4" brush (16" total length)	ETB6	5/8" - 15/16"	24
1" x 4" brush (16" total length)	ETB8	1" - 1-1/16"	24
1-1/4" x 4" brush (29" total length)	ETB10	1-1/4" - 1-5/8"	24

Wire Screens

Screens are used in hollow base material applications to prevent adhesive from running into the hollow cores. Order screens based on rod diameter and adhesive type (ETS for Epoxy-Tie or ATS for Acrylic-Tie). ETS screens are 60 mesh carbon steel and ATS screens are 50 mesh stainless steel. Actual outside diameter of screen is larger than the rod diameter

Material: Carbon Steel and Stainless Steel.



Screens are for use in hollow CMU, hollow brick and unreinforced masonry applications.

For Rod Dia.	Hole Size	Screen Length	Epoxy-Tie Model No.	Acrylic-Tie Model No.
3/8	9/16	3-1/2"	-	ATS373
		6"	ETS376	ATS376
		10"	ETS3710	-
1/2	11/16	3-1/2"	-	ATS503
		6"	ETS506	ATS506
		10"	ETS5010	ATS5010
5/8	7/8	3-1/2"	-	ATS623
		6"	ETS626	ATS626
		10"	ETS6210	ATS6210
		13"	ETS6213	ATS6213
3/4	1"	8"	ETS758	ATS758
		13"	ETS7513	ATS7513
		17"	ETS7517	ATS7517
		21"	ETS7521	-