


**KENRICH
KR
PRODUCTS**

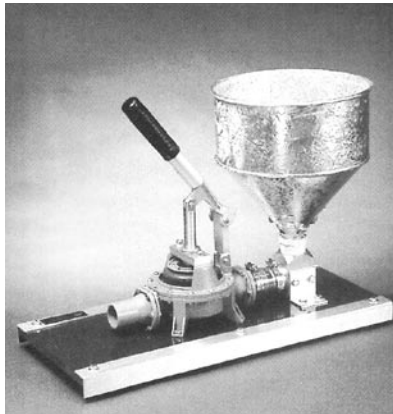

**HAND OPERATED
GROUT PUMPS**

Features

- Hand operated, no electric or air power source needed
- Easy to operate, minimal maintenance required
- Clevis Stabilizer greatly extends diaphragm life and reduces pumping effort.
- Pumps most types of cementitious grout (not for epoxy-type grouts)
- Makes an ideal tool for placing grout anywhere that high pressure is not required
- Lightweight and compact
- Ideal for grouting metal door frames



Options

Hose reducer Kits: 3/4" and 1" ID available
 1 1/2" ID hose lengths: 10', 15' and 20'
 1 1/2" hose ends: Straight, 90° and 180° elbows
 Port seal: Rubber, will fit 1 1/2" hose ends
 Handle: Vertical actuator and handle
 Hi-capacity hopper kit: Converts GP-1HD to GP-2HD specifications



**SLIM-LINE
DEWATERING
PUMPS**

**THE BULLET™
PUMPS**



MODEL R400

Applications

- Construction sites
- Flooded basements
- Ponds, fountains & waterfalls
- Plant wastes & wash down
- General dewatering

Features

- 304SS motor housing; superior to pumps with aluminum housings that wear out pumping sandy water
- Hardened cast iron impellers and volutes.
- 33' power cord on 1/2 HP pumps; 50' power cord on 1 HP and 2 HP pumps.
- Hi Temp dry run motor protection
- Class F motor insulation
- 3 seals: Lip seal, (2) mechanical seals; silicon carbide and carbon/ceramic



MODEL R100

Applications

- Small dewatering jobs
- Garden irrigation from ponds
- Small fountain recirculation

Features

- Quality engineered for long life
- Silicon carbide seal
- Class F motor insulation
- ABS plastic and ss metal parts
- Hi temp dry run motor protection
- Weighs only 13 pounds
- Includes 3/4" garden hose adapter